

PALA

TECHNICAL DATA SHEET QUICK GUIDE



Product Highlights

- High build primer undercoat for timber, metal and previously painted surfaces.
- One pack system for ease of use.
- Available in three stock colours or customer specification.
- **Excellent covering / hiding** power
- Easy to sand for preceding • coats to provide a key.
- Avialble in a range of pack sizes.
- Can be applied by roller, brush or spray.
- Coverage upto 13 m2/litre,





Palatine Paints & Chemicals Limited 55 Smallbrook Lane, Leigh, Lancashire, WN7 5PZ Tel: 01942 884122 sales@palatinepaints.co.uk http://www.palatinepaints.co.uk

The information given on this sheet is, to the best of our knowledge, true and accurate. No guarantee of the results implied, or any loss or damage arising out of this material, however, are possible as the conditions of application are beyond our control. This is not withstanding any liability arising from the Consumer Protection Act 1987 and the Health & Safety at Work Act. Health and Safety data is available on this product and should be referred to prior to its use

Product Description Carboxide All Purpose Primer Undercoat is a solvent borne, high build base coat for

use on bare or new timber, iron, steel and previously painted surfaces. Contains rust inhibiting pigments and has exceptionally high opacity and a full body. Making it perfect as a filler coat for uneven surfaces or if sanding is required on new timber. Available in Grey, Red or White giving any subsequent top coat assistance in covering power. As a multi-functional primer undercoat it provides superior performance.

Pack Sizes with Product Order Codes

500ml	P101G, P101R, P101W
1 Litre	P102G, P102R, P102W
2.5 Litre	P103G, P103R, P103W
5 Litre	P104G, P104R, P104W
20 Litre	P105G, P105R, P105W
205 Litre	Available on Request.

How to Apply

Stir the paint with a drill stirrer or wooden baton at least 2" wide. Apply by brush, solvent resistant roller or spray. The product must be thoroughly stirred to give a uniform consistency prior to application. It is recommended that the contents are stirred periodically during application to avoid settlement. Carboxide All Purpose Primer Undercoat is supplied at the correct viscosity for direct brush application. If thinning is required use Palatine White Spirit. See the detailed TDS for further information on preceding and subsequent coatings. In order to obtain the best results it is important that the correct rate of application is achieved. The minimum application temperature is 10°C. The required thickness of the coating may be built up by successive applications when the previous coat is completely dry. Clean tools and equipment with Palatine White Spirit.

Packaging Disposal

Completely emptied packaging should be put in recycling skips or appropriate container. Packaging which are not empty should be disposed of as special refuse. Please consult the relevant waste authority for clarification.




CUSTOMER SPEC.

ORIGINAL ISSUE DATE: 10/12/2020 **REVISION DATE:**

TECHNICAL **DATA SHEET** QUICK GUIDE

Colours Available

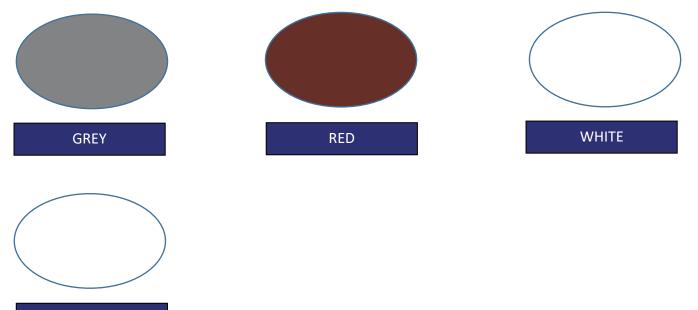



Palatine Paints & Chemicals Limited 55 Smallbrook Lane, Leigh, Lancashire, WN7 5PZ Tel: 01942 884122 sales@palatinepaints.co.uk

http://www.palatinepaints.co.uk

The information given on this sheet is, to the best of our knowledge, true and accurate. No guarantee of the results implied, or any loss or damage arising out of this material, however, are possible as the conditions of application are beyond our control. This is not withstanding any liability arising from the Consumer Protection Act 1987 and the Health & Safety at Work Act. Health and Safety data is available on this product and should be referred to prior to its use