

SAFECEILINGS ONECOAT FIRE PAINT

ULTRA-MATT

KEY BENEFITS

Decoration and fire upgrade to
BS EN Class B & Class 0 in One Coat

- For ceilings coated with any number, type or combination of wall or ceiling paints.
- Ultra Matt decorative finish in white & wall shades.
- Also used as decorative finish for 30 & 60 mins Fire Resistance.

APPLICATION

- 1 good coat applied at 10 sqm per litre.
- With notable colour change OR over solvent based or anti-graffiti paints first apply 1 coat Thermoguard Safewalls Insulating Basecoat.

Brush or Roller


- Apply using a woven short pile roller sleeve or synthetic brush.

Spray

- Pressure Pot and Gun conventional with hand-portable compressor – thin 5% water.
- OR Airless Graco 1500, 3500 or equivalent. 3/8" line, 30 mesh filter on machine, no filter in gun. 521, 523, 621 or 623 tip.
- Ensure coverage is applied as per can i.e., 50 sqm can covers 50sqm.

HOW IT WORKS

Onecoat Ceiling Fire Paint expands in a fire to create a resilient insulating barrier.

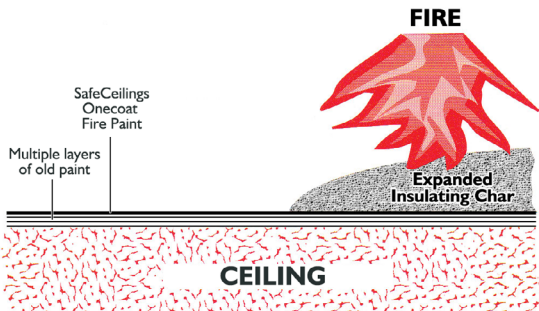

FIRE TEST

- FIRE TEST STANDARDS in UKAS and EOTA – accredited Fire Test laboratory.
- BS EN Class B & Class 0 compliant over multiple layers and combinations of ceiling paints.

PACK SIZES

Sold in 25sqm, 50sq m, 100sqm cans to aid correct application.

COVERAGE

Follow on can guide to coverage to enable project Certification.

DRYING TIMES

In normal conditions product will be touch dry in an hour and fully dry after 4 hours.

APPLICATION CONDITIONS

- Do not apply in temperatures under 8°C or above 30°C.
- Maximum relative Humidity below 75%.
- Surface should be at least 3°C above the dew point.
- Do not apply when condensation could occur.

PREPARATION

- Clean to remove any surface contamination.
- Seal any penetrating stain area with Coovar shellac free Primal.

VOC CONTENT

- Low VOC EU limit for this product (cat A/i) is 140 g/l.
- This product contains 16 g/lv.

COMPOSITION

Catalytic and insulating barrier forming compounds.

CERTIFICATES

Once the works are complete, a project and area specific Certificate available after due diligence via www.thermoguard.co.uk stating any project specification number.

FURTHER ASSISTANCE

Technical 01 142 768008 or technical@thermoguard.co.uk



All materials and specifications are provided in accordance with the Terms and Conditions of Thermoguard UK Ltd.
Refer to Health & Safety Data Sheets before using these products.

Units B1, B2 Enterprise Park,
Wigwam Lane, Hucknall, NG15 7SZ.
Phone: 01142 768008
Fax: 01142 381966
Email: technical@thermoguard.co.uk

THERMOGUARD
FIRE & PROTECTIVE PAINTS
www.thermoguard.co.uk

